






# ALBUZ® AVI OC 80°



300.618.5 EPDM  
300.618.6 FPM/FKM



**ALBUZ**  
ITALIAN  
EXCLUSIVE  
DISTRIBUTOR

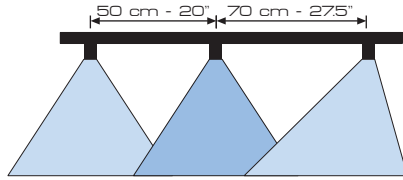

**Materiali:** materiali plastici ad alta resistenza - allumina. **Impiego:** su macchine per trattamenti a tutto campo. Angolo di spruzzo 80° fuori centro (15° / 65°). Idoneo per trattamenti con prodotti chimici sistemici o a contatto e fertilizzanti liquidi. Ugello anti deriva ad iniezione d'aria. Dimensioni compatte (lunghezza 27 mm). Distribuzione eccellente in un ampio arco di pressioni. Migliora i risultati dei trattamenti nelle zone perimetrali delle colture. **Confezioni da:** 50

**Materials:** high resistance plastic materials - A/203 alumina ceramic. **Use:** on boom sprayers. Off center 80° (15° / 65°) spray angle. All types of application including liquid fertilizers. Air injection anti drift flat fan spray tip. Compact size (27 mm / 1.063" length). Excellent spray distribution over a wide range of pressures. Improved spraying over field borders. **Pieces per box:** 50

FILTRO	COME SI ORDINA	bar	l/min	LITRI PER ETTERO	VELOCITÀ km/h									
					4	5	6	8	10	12	14	16	18	20
80 MESH	227.1810.4 (80015) VERDE	2	0.49		147	118	98	74	59	49	42	37	33	29
		3	0.60		180	144	120	90	72	60	51	45	40	36
		4	0.69		208	166	139	104	83	69	59	52	46	42
		5	0.77		233	186	155	116	93	78	66	58	51	47
		6	0.85		255	204	170	127	102	85	73	64	57	51
		7	0.92		276	221	184	138	110	92	79	69	61	55
		8	0.95		195	156	130	98	78	65	56	49	43	39
80 MESH	227.1810.5 (8002) GIALLO	3	0.80		240	192	160	120	96	80	69	60	53	48
		4	0.92		276	221	184	138	110	92	79	69	61	55
		5	1.03		309	247	206	155	124	103	88	77	69	62
		6	1.13		339	271	226	170	136	113	97	85	75	68
		7	1.22		366	293	244	183	146	122	105	92	81	73
		8	0.92		246	197	164	123	98	82	70	62	55	49
		9	1.15		345	276	230	173	138	115	99	86	77	69
50 MESH	227.1810.6 (80025) LILLA	4	1.29		387	310	258	194	155	129	111	97	86	77
		5	1.41		423	338	282	212	169	141	121	106	94	85
		6	1.53		459	367	306	230	184	153	131	115	102	92
		7	1.65		494	396	324	248	196	162	138	121	107	96
		8	1.77		529	425	342	266	204	170	144	125	110	100
		9	1.89		564	454	360	284	222	188	154	133	117	106
		10	2.01		599	483	378	302	240	196	160	137	121	110
50 MESH	227.1810.7 (8003) BLU	2	1.31		393	314	262	197	157	131	112	98	87	79
		3	1.60		480	384	320	240	192	160	137	120	107	96
		4	1.85		555	444	370	278	222	185	159	139	123	111
		5	2.07		621	497	414	311	248	207	177	155	138	124
		6	2.26		678	542	452	339	271	226	194	170	151	136
		7	2.44		732	586	488	366	293	244	209	183	163	146
		8	2.62		786	629	516	394	311	250	209	183	163	146

STRAINER	HOW TO ORDER	psi	USGal/min	US GALLONS PER ACRE	SPEED mph									
					2	3	4	5	6	7	9	10	11	12
80 MESH	227.1810.4 (80015) GREEN	30	0.130		19.3	12.9	9.7	7.7	6.4	5.5	4.3	3.9	3.5	3.2
		40	0.150		22.3	14.9	11.1	8.9	7.4	6.4	5.0	4.5	4.1	3.7
		50	0.168		25.0	16.6	12.5	10.0	8.3	7.1	5.5	5.0	4.5	4.2
		70	0.198		29.4	19.6	14.7	11.8	9.8	8.4	6.5	5.9	5.4	4.9
		85	0.219		32.5	21.7	16.7	13.0	10.9	9.3	7.2	6.5	5.9	5.4
		100	0.237		35.2	23.5	17.6	14.1	11.7	10.1	7.9	7.0	6.4	5.9
		120	0.264		39.7	26.4	19.5	15.6	12.9	11.1	8.5	7.4	6.7	6.1
80 MESH	227.1810.5 (8002) YELLOW	30	0.173		29.7	17.1	12.9	10.3	8.6	7.3	5.7	5.1	4.7	4.3
		40	0.200		29.7	19.8	14.9	11.9	9.9	8.5	6.6	5.9	5.4	5.0
		50	0.224		33.3	22.2	16.6	13.3	11.1	9.5	7.4	6.7	6.1	5.5
		70	0.265		39.4	26.2	19.7	15.7	13.1	11.2	8.8	7.9	7.2	6.6
		85	0.292		43.4	28.9	21.7	17.4	14.5	12.4	9.6	8.7	7.9	7.3
		100	0.316		46.9	31.3	23.5	18.8	15.6	13.4	10.4	9.4	8.5	7.8
		120	0.346		51.4	34.3	25.7	20.6	17.1	14.7	11.4	10.3	9.3	8.6
50 MESH	227.1810.6 (80025) LILAC	30	0.217		32.2	21.5	16.1	12.9	10.7	9.2	7.1	6.5	5.9	5.4
		40	0.250		37.1	24.8	18.6	14.9	12.4	10.6	8.3	7.4	6.8	6.2
		50	0.280		41.6	27.7	20.8	16.6	13.9	11.9	9.2	8.3	7.6	6.9
		70	0.331		49.2	32.8	24.6	19.7	16.4	14.0	10.9	9.8	8.9	8.2
		85	0.364		54.1	36.0	27.0	21.6	18.0	15.4	12.0	10.8	9.8	9.0
		100	0.395		58.7	39.1	29.3	23.5	19.6	16.8	13.0	11.7	10.7	9.8
		120	0.426		63.6	42.2	31.6	25.4	21.5	18.7	14.9	13.4	12.3	11.3
50 MESH	227.1810.7 (8003) BLUE	30	0.260		38.6	25.7	19.3	15.4	12.9	11.0	8.6	7.7	7.0	6.4
		40	0.300		44.6	29.7	22.3	17.8	14.9	12.7	9.9	8.9	8.1	7.4
		50	0.335		49.7	33.2	24.9	19.9	16.6	14.2	11.1	10.0	9.1	8.3
		70	0.397		59.0	39.3	29.5	23.6	19.7	16.8	13.1	11.8	10.7	9.8
		85	0.437		64.9	43.3	32.5	26.0	21.6	18.5	14.4	13.0	11.8	10.8
		100	0.474		70.4	46.9	35.2	28.2	23.5	20.1	15.6	14.1	12.8	11.7
		120	0.511		75.9	50.9	38.1	30.4	25.4	21.5	17.7	16.1	14.7	13.6
50 MESH	227.1810.8 (8004) RED	30	0.346		51.4	34.3	25.7	20.6	17.1	14.7	11.4	10.3	9.3	8.6
		40	0.400		59.4	39.6	29.7	23.8	19.8	17.0	13.2	11.9	10.8	9.9
		50	0.447		66.4	44.3	33.2	26.6	22.1	19.0	14.8	13.3	12.1	11.1
		70	0.529		78.6	52.3	39.3	31.4	26.2	22.5	17.5	15.7	14.3	13.1
		85	0.566		84.1	56.0	42.0	33.6	28.0	24.0	18.7	16.8	15.3	14.0
		100	0.632		93.9	62.6	46.9	37.5	31.3	26.8	20.9	18.8	17.1	15.6
		120	0.698		103.7	69.2	51.8	41.4	34.6	29.7	23.8	21.9	19.7	18.0